


Close to wall applications possible.

Thanks to its compact design C3606DPA has the ability to cut very close to walls, up to 14 mm. This makes it ideal for high precision tasks, like trimming the edges of installed wooden flooring.

Absolutely loaded with even more convenient features.

C3606DPA has a full package of features designed for precision and ease, making it highly versatile for various cutting tasks. Its flexibility and adaptability to different materials and scenarios render it invaluable for the professional.



Inspection window for perfect view on the blade.



Double depth adjustment for accuracy with or without guide rails.



Undercut function (-1°/+46°) enables precise fitting cuts.



Clean working thanks to dustbag/vacuum connector.

High quality accessories for your plunge cut saw.

High-quality accessories for your plunge cut saw boost performance, precision, and lifespan, while reducing damage risks for a safer, more efficient cutting experience.

Description	Art.no.
Guide rail GR800	4100071
Guide rail GR1600	4100072
Carrier bag for guide rail GR1600	379259
Connector for guide rail GR800 and GR1600	4100080
Splinter protection roll, 1.7 m	4100077
Sliding coating roll, 1.7 m	4100078

Description	Art.no.
Anti-slip coating roll, 1.7 m	4100079
Miter fence	379264
Rip fence	4100082
Steel screw clamp	711237
Steel lever clamp	711238
Circular saw bade 165 x 1.8/1.2 x 20 mm, T36	752415



HiKOKI Power Tools Nederland
Brabanthaven 11

3433 PJ Nieuwegein Tel. 030 6084050

Follow us on our socials and never miss out on HiKOKI news.

hikoki-powertools.nl

(i) (ii) (iii) (iii)



36V Cordless Plunge Cut Saw C3606DPA

Extremely powerful and accurate. **Discover our new Cordless** Plunge Cut Saw C3606DPA. Full guide rail compatability 66 mm cutting depth, 61 mm on guide rail Fast stopping brake Compatible **BRUSHLESS**



The future is now.

We introduce to you our 36V Cordless Plunge Cut Saw C3606DPA. Engineered for precision, with a cutting depth of 66 mm, it is leading its class in performance. With an extremly powerful 36V motor, variable speed control and full guide rail compatability, the C3606DPA is designed to deliver clean, precise cuts for a multitude of materials.

C3606DPA


Cordless Plunge Cut Saw

Specifications	
Voltage	36V
No-load speed	2,500 - 5,200 /min.
Saw blade diameter	165 mm
Mount hole diameter	20 mm
Maximum cutting depth 90°	66 mm
Maximum cutting depth 45°	43 mm
Max. cutting depth with guide rail	61 mm
Cutting depth adjustability	0 - 66 mm
Bevel capacity	-1°/46°
Brushless motor	\checkmark
Guide rail compatability	✓
Variable speed	\checkmark
Brake	\checkmark
LED	✓
Soft start	✓
Dimensions (L x W x H)	391 x 206 x 269 mm
Weight with BSL36A18X1	5.4 kg

C3606DPAWVZ: 2x battery BSL36B18X, fastcharger UC18YSL3, dust bag, saw blade, stackable case HSC IV

C3606DPAW2Z: Dust bag, saw blade, stackable case HSC IV


¹ Weight according to EPTA-2004 procedure. ² Standard accessories vary by country or area

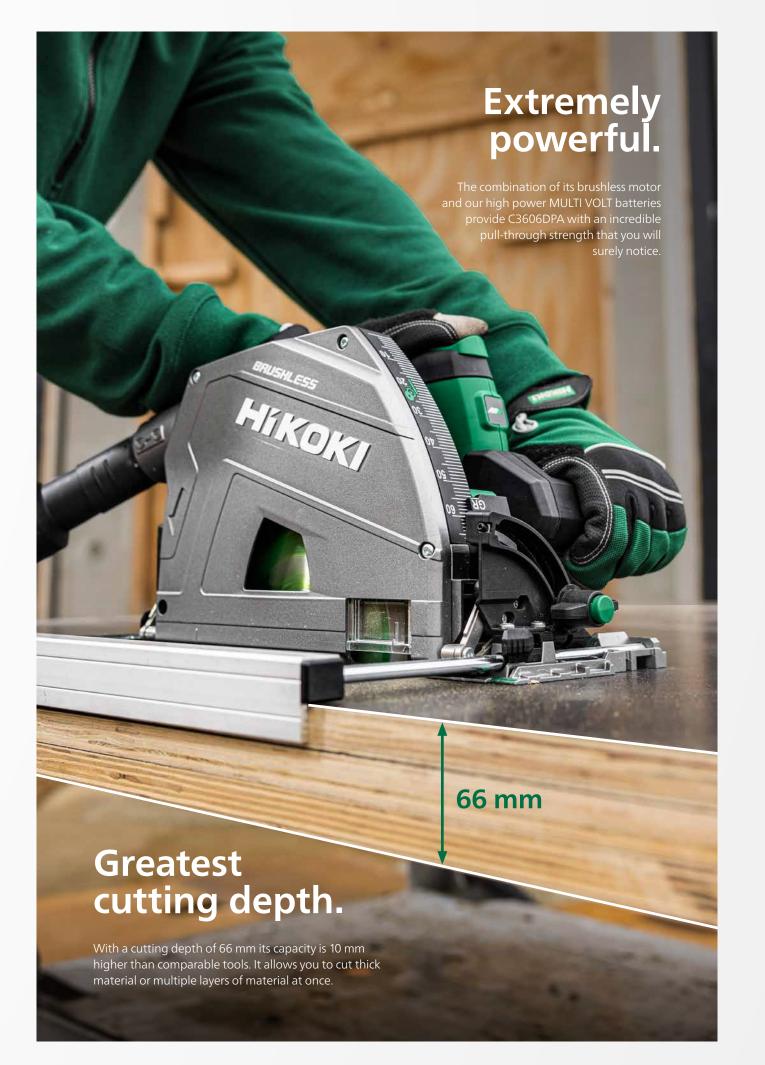

Huge working amount.

Comparison of cutting amount.

Cutting 1,000 mm long and 40 mm thick hardwood on maximum speed, in combination with the saw blade 165 mm and the BSL36B18X.

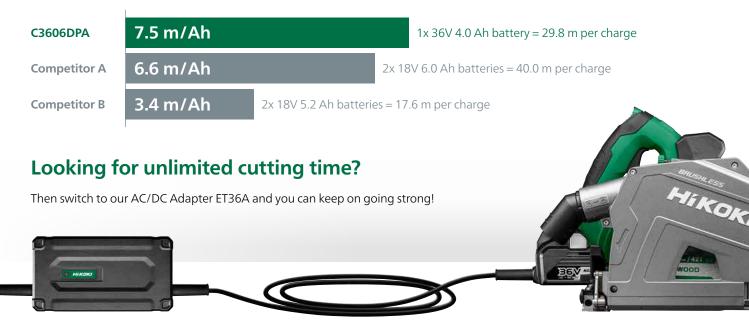



Full guide rail compatibility.

Of course C3606DPA is compatible with our own guide rails, but it is even compatible with guide rails of other brands such as Makita, Bosch, Festool, and Hilti. With the guide rail adjustment you can perfectly fit the tool to the used guide rail for highest precision.



The right speed for each task.

The plunge cut saw features a variable speed dial with settings up to 12, offering precise speed control for different materials and tasks. This ensures the best experience with both delicate and tough materials.



GR1600